

## Analog - Digital multimeters

RISH Multi<sup>®</sup> 12S...18S

CAT-IV



**RISHABH  
INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT LTD.

F-31, MIDC, Satpur, Nashik-422 007, India.

Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064

E-mail : marketing@rishabh.co.in

[www.rishabh.co.in](http://www.rishabh.co.in)

# Analog - Digital multimeters

## RISH Multi<sup>®</sup> 12S...18S

### Automatic Terminal Blocking System (ABS)

The automatic Terminal blocking system prevents incorrect connection of the test leads and incorrect selection of the measured quantity. This reduces danger to the user, the meter and the system to a remarkable extent.

### Interface And Software RISH com 100

The multimeters are fitted with a serial RS-232 C interface via which the measured values can be transmitted to a PC. These values, electrically isolated, are transmitted to the attachable interface adaptor with infrared light through the case\*

### MIN/MAX Value Storage

In addition to the display of the actual measured value, the minimum or maximum value can constantly be updated and stored.

### Indication Of Negative Values On The Analog Scale

When measuring DC quantities, also negative values are shown on the analog scale so that variations of the measured value can be observed at the zero point.

### Indication Of Negative Values On The Analog Scale

The measuring principle employed permits the measurement of the root-mean-square value (TRMS) of AC quantities and mixed quantities (AC and DC) regardless of the waveform.

### Automatic Data Hold\*

The DATA HOLD function makes it possible to hold the digitally displayed measured value. According to a patented method, it is ensured that no freak value but the actual measured value is held in the case of rapid changes in measured quantities. The held measured value appears on the digital display. The actual measured value continues to be shown on the analog scale.

### Autoranging / Manual Range Selection

The measured values are selected with rotary switch. The measuring range is automatically matched to the measured value. The measuring range can also be selected manually via the AUTO/MAN push button.

### Continuity Test

This permits testing for short circuit and open circuit. In addition to the display, a facility of sound signal is available.

### Temperature Measurement

It is possible to use all models of RISH multi series, in direct connection of temperature sensor Pt 100 / Pt 1000. The meters automatically detects the type of sensors connected to it & displays directly measured temperature.

### Signalling in the case of a blown fuse

The display FUSE points to a blown fuse.

### Power economizing circuit

The meter disconnects automatically when the measured value remains unchanged for about 10 minutes and no operating control was operated during this time. The disconnection facility can be disabled.

\* Protected by patent rights



### Overload Warning

A sound signal indication violation of the overload limits.

### Protective holster for rough duty

A holster of soft rubber with tilt stand protects the meter against damage in the case of shock and drop. The rubber material makes for the meter to stand firmly even on vibrating surface.

### Top model RISH multi 18S

The top model Rish multi 18S features a 4 3/4 digit display (31 000 digits) as well as the following additional functions : Event counter, measurement of the duration of the event, time counter (stop watch), data compare, dB measurement, wide-range capacitance measurement.

### Calibration

RISH multi is automatically calibrated with respect to Fluke 5500 / Wavetek 9100. Automatic calibration is done through a developed calibration software with RS232 connection to the multimeter. Every multimeter is provided with the Test Certificate which is traceable to National / International standards. All the meters can be recalibrated at the Rishabh Instruments.

### Applied rules and standards :

|   |   |
|---|---|
| IEC 61010-1:2001<br>DIN EN 61010 part 1<br>VDE 0411-1 | Safety requirements for electrical equipment for measurement, control and laboratory use.   |
| DIN 43751<br>IS 13875                                 | Digital measuring instruments   |
| EN 61326:2002   | Generic emission standard; Residential, commercial and light industry.                      |
| EN 61326:2002   | Generic immunity standard; residential, commercial and light industry.                      |
| VDI/VDE 3540  | Reliability of measuring and control equipment.   |
| DIN EN 60529<br>DIN VDE 0470 part 1                   | Test equipment and test procedures -Degrees of protection provided by enclosures (IP Code). |



**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in

# Analog - Digital multimeters

RISH Multi<sup>®</sup> 12S...18S

## Specifications RISH *multi* 12S... 16S

| Meas.<br>function | Measuring range       |     |     |     |     | Resolution       | Input impedance |                         | Inherent deviation of the digital display<br>± (...% of meas. val. + ...digits)<br>for reference condition |                       |                               |                               |                       | 4)<br>Overload capacity            |                      | Measuring<br>function                                       |        |
|-------------------|-----------------------|-----|-----|-----|-----|------------------|-----------------|-------------------------|--|-----------------------|-------------------------------|-------------------------------|-----------------------|------------------------------------|----------------------|---|--------|
|                   | RISHMulti             | 12S | 13S | 14S | 15S |                  |                 |                         | 12S  | 13S                   | 14S                           | 15S                           | 16S                   | Overload<br>value                  | Overload<br>duration |   |        |
| V--               | 30.00 mV              | ●   | ●   | ●   | ●   | ●                | 10 µV           | > 10 GΩ // < 40 pF      | 0.5 + 3 <sup>5)</sup>  | 0.5 + 3 <sup>5)</sup> |                               |                               |                       |                                    |                      | 1000 V<br>DC<br>cont.                                       | V--    |
|                   | 300.00mV              | ●   | ●   | ●   | ●   | ●                | 100 µV          | > 10 GΩ // < 40 pF      | 0.5 + 3  | 0.5 + 3               |                               |                               |                       |                                    |                      |   |        |
|                   | 3.000 V               | ●   | ●   | ●   | ●   | ●                | 1 mV            | 11MΩ // < 40 pF         | 0.25 + 1   | 0.1 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 30.00 V               | ●   | ●   | ●   | ●   | ●                | 10 mV           | 10MΩ // < 40 pF         | 0.25 + 1   | 0.1 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 300.00 V              | ●   | ●   | ●   | ●   | ●                | 100 mV          | 10MΩ // < 40 pF         | 0.25 + 1   | 0.1 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 1000 V                | ●   | ●   | ●   | ●   | ●                | 1 V             | 10MΩ // < 40 pF         | 0.35 + 1   | 0.1 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   |                       |     |     |     |     |                  |                 |                         |  |                       |                               |                               |                       |                                    |                      |   |        |
| V~                | 3.000 V               | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 1 mV            | 11MΩ // < 40 pF         |  |                       |                               |                               |                       |                                    |                      | 0.75 + 3<br>(> 10 D)<br>AC<br>effective<br>sinusoidal       | V~     |
|                   | 30.0 V                | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 10 mV           | 10MΩ // < 40 pF         |  |                       |                               |                               |                       |                                    |                      |   |        |
|                   | 300.0 V               | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 100 mV          | 10MΩ // < 40 pF         |  |                       |                               |                               |                       |                                    |                      |   |        |
|                   | 1000 V                | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 1 V             | 10MΩ // < 40 pF         |  |                       |                               |                               |                       |                                    |                      |   |        |
|                   |                       |     |     |     |     |                  |                 |                         |  |                       |                               |                               |                       |                                    |                      |   |        |
| V=                | 3.000 V               | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 1 mV            | 11MΩ // < 40 pF         | ---  | ---                   | ---                           | ---                           | ---                   |                                    |                      | 0.75 + 3<br>(> 10 D)<br>0.75 + 1 (> 300 D)                  | V=     |
|                   | 30.0 V                | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 10 mV           | 10MΩ // < 40 pF         | ---  | ---                   | ---                           | ---                           | ---                   |                                    |                      |   |        |
|                   | 300.0 V               | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 100 mV          | 10MΩ // < 40 pF         | ---  | ---                   | ---                           | ---                           | ---                   |                                    |                      |   |        |
|                   | 1000 V                | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 1 V             | 10MΩ // < 40 pF         | ---  | ---                   | ---                           | ---                           | ---                   |                                    |                      |   |        |
|                   |                       |     |     |     |     |                  |                 |                         |  |                       |                               |                               |                       |                                    |                      |   |        |
| A=                |                       |     |     |     |     |                  |                 | Voltage drop, approx.   |  |                       |                               |                               |                       |                                    |                      |   | A=     |
|                   | 300.0 µA              | ●   | ●   | ●   | ●   | ●                | 100 nA          | ---                     | ---  | 15 mV                 | ---                           | ---                           | 1.0 + 5 (> 10 D)      | 0.5 + 5 (> 10 D)                   |                      |   |        |
|                   | 3.000 mA              | ●   | ●   | ●   | ●   | ●                | 1 µA            | 15 mV                   | 15 mV  | 150 mV                | 1.0 + 5 (> 10D)               | 1.0 + 2                       | 0.5 + 2               | 0.36 A                             | cont.                |   |        |
|                   | 30.00 mA              | ●   | ●   | ●   | ●   | ●                | 10 µA           | 150 mV                  | 150 mV   | 650 mV                | 0.25 + 2                      | 1.0 + 5 (< 10 D)              | 0.5 + 5 (> 10 D)      |                                    |                      |   |        |
|                   | 300.00 mA             | ●   | ●   | ●   | ●   | ●                | 100 µA          | 1 V                     | 1 V  | 1 V                   |                               | 1.0 + 2                       | 0.5 + 2               |                                    |                      |   |        |
|                   | 3.000 A               | ●   | ●   | ●   | ●   | ●                | 1 mA            | ---                     | 100 mV   | 100 mV                | ---                           | 1.0 + 5 (> 10 D)              | 1.0 + 5 (> 10 D)      |                                    |                      |   |        |
|                   | 30.00 A               | ●   | ●   | ●   | ●   | ●                | 10 mA           | ---                     | 300/270mV  | 270 mV                | ---                           | 1.0 + 2                       | 1.0 + 2               | 7)                                 | 7)                   |   |        |
|                   | 300.0 A <sup>2)</sup> | ●   | ●   | ●   | ●   | ●                | 10 mA           | 150 mV                  | ---  | ---                   | 150 mV                        | ---                           | 1.5 + 2 (> 10 D)      | ---                                | 0.36 A               | cont.   |        |
|                   | 300.0 A <sup>2)</sup> | ●   | ●   | ●   | ●   | ●                | 100 mA          | 150 mV                  | 150 mV   | 150 mV                | ---                           | 1.5 + 2 (> 10 D)              | ---                   | 7)                                 | 7)                   |   |        |
|                   | 3.000 mA              | ●   | ●   | ●   | ●   | ● <sup>(1)</sup> | 100 µA          | 1 V                     | 1 V  | 1 V                   | ---                           | 1.5 + 2 (> 10 D)              | ---                   | 1.5 + 2 (> 10 D)                   | 1.5 + 2 (> 10 D)     | 12 A  | 10 min |
| A~                |                       |     |     |     |     |                  |                 | No-load voltage         |  |                       |                               |                               |                       |                                    |                      |   | A~     |
|                   | 30.00 Ω               | ●   | ●   | ●   | ●   | ●                | 10 mΩ           | max. 3.2 V              | 0.5 + 3 <sup>5)</sup>  | 0.4 + 3 <sup>5)</sup> |                               |                               |                       |                                    |                      | 1000 V<br>DC<br>AC<br>effective<br>sinusoidal               | Ω      |
|                   | 300.0 Ω               | ●   | ●   | ●   | ●   | ●                | 100 mΩ          | max. 3.2 V              | 0.5 + 3  | 0.4 + 3               |                               |                               |                       |                                    |                      |   |        |
|                   | 3.000 kΩ              | ●   | ●   | ●   | ●   | ●                | 1Ω              | max. 1.25 V             | 0.4 + 1  | 0.2 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 30.00 kΩ              | ●   | ●   | ●   | ●   | ●                | 10Ω             | max. 1.25 V             | 0.4 + 1  | 0.2 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 300.0 kΩ              | ●   | ●   | ●   | ●   | ●                | 100Ω            | max. 1.25 V             | 0.4 + 1  | 0.2 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 3.000 MΩ              | ●   | ●   | ●   | ●   | ●                | 1 kΩ            | max. 1.25 V             | 0.6 + 1  | 0.4 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 30.00 MΩ              | ●   | ●   | ●   | ●   | ●                | 10 kΩ           | max. 1.25 V             | 2.0 + 1  | 2.0 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   | 2.000 V               | ●   | ●   | ●   | ●   | ●                | 1 mV            | max. 3.2 V              | 0.25 + 1   | 0.1 + 1               |                               |                               |                       |                                    |                      |   |        |
|                   |                       |     |     |     |     |                  |                 | Discharge<br>resistance | U <sub>0 max</sub>   |                       |                               |                               |                       |                                    |                      |   |        |
| F                 | 30.00 nF              | ●   | ●   | ●   | ●   | ●                | 10 pF           | 250 kΩ                  | 2.5 V  | ---                   | ---                           | ---                           | 1.0 + 3 <sup>6)</sup> | 1000 V                             | 10 min               | F   |        |
|                   | 300.0 nF              | ●   | ●   | ●   | ●   | ●                | 100 pF          | 250 kΩ                  | 2.5 V  | ---                   | ---                           | ---                           | 1.0 + 3               | DC / AC<br>effective<br>sinusoidal |                      |   |        |
|                   | 3.000 µF              | ●   | ●   | ●   | ●   | ●                | 1 nF            | 25 kΩ                   | 2.5 V  | ---                   | ---                           | ---                           | 1.0 + 3               |                                    |                      |   |        |
|                   | 30.00 µF              | ●   | ●   | ●   | ●   | ●                | 10 nF           | 25 kΩ                   | 2.5 V  | ---                   | ---                           | ---                           | 3.0 + 3               |                                    |                      |   |        |
| Hz                |                       |     |     |     |     |                  |                 | Sensor                  | F <sub>min</sub> V ==  | F <sub>min</sub> V ~  |                               |                               |                       |                                    |                      | ≤ 3 kHz:<br>300V<br>≤ 30 kHz:<br>300V<br>≤ 100 kHz:<br>30 V | Hz     |
|                   | 300.0 Hz              | ●   | ●   | ●   | ●   | ●                | 0.1 Hz          | 1 Hz                    | 45 Hz  | ---                   | ---                           | ---                           | 0.5 + 1 <sup>8)</sup> |                                    |                      |   |        |
|                   | 3.000 kHz             | ●   | ●   | ●   | ●   | ●                | 1 Hz            | 1 Hz                    | 45 Hz  | ---                   | ---                           | ---                           |                       |                                    |                      |   |        |
|                   | 30.00 kHz             | ●   | ●   | ●   | ●   | ●                | 10 Hz           | 10 Hz                   | 45 Hz  | ---                   | ---                           | ---                           |                       |                                    |                      |   |        |
|                   | 100.0 kHz             | ●   | ●   | ●   | ●   | ●                | 100 Hz          | 100 Hz                  | 100 Hz   | ---                   | ---                           | ---                           |                       |                                    |                      |   |        |
| %                 | 2.0... 98.0 %         | ●   | ●   | ●   | ●   | ●                | 0.1 %           | 1 Hz                    | ---  | ---                   | ---                           | ---                           | ---                   | 1 Hz....1kHz: ± 5 D <sup>9)</sup>  |                      | ≤ 3 kHz:<br>300V<br>≤ 30 kHz:<br>300V<br>≤ 100 kHz:<br>30 V | %      |
|                   | - 200... + 200 °C     | ●   | ●   | ●   | ●   | ●                | 0.1°C           | Pt 100                  | ---  | ---                   | 2 Kelvin + 5 D <sup>10)</sup> | 1000 V                        | 10 min                |                                    |                      |   |        |
|                   | + 200... + 850 °C     | ●   | ●   | ●   | ●   | ●                | 0.1°C           | Pt 1000                 | ---  | ---                   | 1.0 + 5 <sup>10)</sup>        | DC                            |                       |                                    |                      |   |        |
|                   | - 100... + 200 °C     | ●   | ●   | ●   | ●   | ●                | 0.1°C           | Pt 1000                 | ---  | ---                   | 2 Kelvin + 2 D <sup>10)</sup> | AC<br>effective<br>sinusoidal |                       |                                    |                      |   |        |
|                   | + 200... + 850 °C     | ●   | ●   | ●   | ●   | ●                | 0.1°C           |                         | ---  | ---                   | 1.0 + 2 <sup>10)</sup>        |                               |                       |                                    |                      |   |        |

- 1) TRMS measurement
  - 2) Direct display with clip-on transformer 1000:1
  - 3) At 0°C... +40°C
  - 5) With zero setting; w/o zero setting + 35 digits
  - 6) With zero setting; w/o zero setting + 50 digits
  - 7) RISH multi 13S (w/o 16A fuset): 16A cont., 20A for 5 min;  
RISH multi 14S... 16S: 12A for 5 min, 16A for 30s

- 8) Range       $3V \leq U_E \leq 1.5V_{rms} \dots 100V_{rms}$   
 $30V \leq U_E \leq 15V_{rms} \dots 300V_{rms}$   
 $300V \leq U_E \leq 150V_{rms} \dots 1000V_{rms}$

9) On the range  $3V \leq$  rectangular signal positive at one end  $\dots 15V$ ,  $f = \text{const.}$ ,  
not  $163.84 \text{ Hz}$  or integer multiple.

10) Which one?



**RISHABH**  
INSTRUMENTS  
Measure, Control & Record with a Difference

**RISHABH INSTRUMENTS PVT.LTD.**  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel. : +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : [marketing@rishabh.co.in](mailto:marketing@rishabh.co.in)  
[www.rishabh.co.in](http://www.rishabh.co.in)

# Analog - Digital multimeters

RISH Multi<sup>®</sup> 12S...18S

## Specifications RISH multi 18S

| Meas.<br>function                         | Measuring range   | Resolution                               | Input impedance        |                         | Inherent error of the digital display<br>± (...% of rdg.+... digits)<br>at reference conditions |   | Overload value                          | Overload duration | 2)<br>Meas.<br>function                   |  |  |  |  |
|---|-------------------|--|------------------------|-------------------------|---|---|---|-------------------|---|--|--|--|--|
|   |                   |  | =                      | $\equiv^1)$             | =   | $\sim^1)$   |   |                   |   |  |  |  |  |
| <b>V</b>                                  | 300.00 mV         | 10 $\mu$ V                               | >10 G $\Omega$         | 5 M $\Omega$ // < 40 pF | 0.05 + 3; 0.05 + 20 <sup>3)</sup>   | 1.0 + 30 (> 600 Digit)  | 1000 V<br>DC<br>AC<br>RMS<br>sinusoidal | cont.             | <b>V</b>                                  |  |  |  |  |
|   | 3.0000 V          | 100 $\mu$ V                              | 11 M $\Omega$          | 5 M $\Omega$ // < 40 pF | 0.05 + 3  | 0.5 + 30 (> 300 Digit)  |   |                   |   |  |  |  |  |
|   | 30.000 V          | 1 mV                                     | 10 M $\Omega$          | 5 M $\Omega$ // < 40 pF | 0.05 + 3  | 0.5 + 30 (> 300 Digit)  |   |                   |   |  |  |  |  |
|   | 300.000 V         | 10 mV                                    | 10 M $\Omega$          | 5 M $\Omega$ // < 40 pF | 0.05 + 3  | 0.5 + 30 (> 300 Digit)  |   |                   |   |  |  |  |  |
| <b>dB</b>                                 | See table below   |  | —                      | as at V~                | —   | $\pm 0.5 \text{ dB}^{4)}$   | 12A <sup>5)</sup>                       | 5 min             | <b>dB</b>                                 |  |  |  |  |
|   |                   |  | Voltage drop. approx.  |                         |   |   |   |                   |   |  |  |  |  |
| <b>mA</b>                                 | 300.00 $\mu$ A    | 10 nA                                    | 15 mV                  | 15 mV                   | 0.2 + 20  | 1.2 + 30 (> 300 Digit)  | 0.36 A<br>cont.                         | <b>mA</b>         |   |  |  |  |  |
|   |                   | 100 nA                                   | 150 mV                 | 150 mV                  | 0.2 + 10  | 1.2 + 30 (> 300 Digit)  |   |                   |   |  |  |  |  |
|   |                   | 1 $\mu$ A                                | 30 mV                  | 30 mV                   | 0.05 + 10   | 1.2 + 50 (> 300 Digit)  |   |                   |   |  |  |  |  |
|   |                   | 10 $\mu$ A                               | 300 mV                 | 300 mV                  | 0.2 + 10  | 1.2 + 30 (> 300 Digit)  |   |                   |   |  |  |  |  |
| <b>A</b>                                  | 3.0000 A          | 100 $\mu$ A                              | 150 mV                 | 150 mV                  | 0.5 + 10  | 1.2 + 50 (> 300 Digit)  | 12A <sup>5)</sup>                       | 5 min             | <b>A</b>                                  |  |  |  |  |
|   |                   | 1.000 A                                  | 400 mV                 | 400 mV                  | 0.5 + 10  | 1.2 + 30 (> 300 Digit)  |   |                   |   |  |  |  |  |
|   |                   |  | No-load voltage        | Short circuit current   |   |   |   |                   |   |  |  |  |  |
| <b><math>\Omega</math></b>                | 300.00 $\Omega$   | 10 m $\Omega$                            | max. 4.00 V            | max. 1 mA               | 0.1 + 6; 0.1 + 30 <sup>3)</sup>   |   | 1000 V<br>DC<br>AC<br>RMS<br>sinusoidal | 1 min             | <b><math>\Omega</math></b>                |  |  |  |  |
|   | 3.0000 k $\Omega$ | 100 m $\Omega$                           | max. 1.25 V            | max. 100 $\mu$ A        | 0.1 + 6   |   |   |                   |   |  |  |  |  |
|   | 30.000 k $\Omega$ | 1 $\Omega$                               | max. 1.25 V            | max. 10 $\mu$ A         | 0.1 + 6   |   |   |                   |   |  |  |  |  |
|   | 300.00 k $\Omega$ | 10 $\Omega$                              | max. 1.25 V            | max. 1 $\mu$ A          | 0.1 + 6   |   |   |                   |   |  |  |  |  |
|   | 3.0000 M $\Omega$ | 100 $\Omega$                             | max. 1.25 V            | max. 0.1 $\mu$ A        | 0.1 + 6   |   |   |                   |   |  |  |  |  |
| <b><math>\rightarrow\leftarrow</math></b> | 3.0000 V-         | 1k $\Omega$                              | max. 1.25 V            | max. 0.1 $\mu$ A        | 1.0 + 6   |   | 12A <sup>5)</sup>                       | 5 min             | <b><math>\rightarrow\leftarrow</math></b> |  |  |  |  |
|   |                   | 1mV                                      | max. 4.00 V            | ---                     | 0.2 + 3   |   |   |                   |   |  |  |  |  |
|   |                   |  | Discharge resist.      | $U_{0\text{max}}$       |   |   |   |                   |   |  |  |  |  |
| <b>F</b>                                  | 3.000 nF          | 1 pF                                     | 1.5 M $\Omega$         | 4 V                     | 1.0 + 6; 1.0 + 60 <sup>3)</sup>   |   | 1000 V<br>DC<br>AC<br>RMS<br>sinusoidal | 1 min             | <b>F</b>                                  |  |  |  |  |
|   | 30.000 nF         | 10 pF                                    | 1.5 M $\Omega$         | 4 V                     | 1.0 + 6; 1.0 + 30 <sup>3)</sup>   |   |   |                   |   |  |  |  |  |
|   | 300.0 nF          | 100 pF                                   | 150 k $\Omega$         | 4 V                     | 1.0 + 3   |   |   |                   |   |  |  |  |  |
|   | 3.000 $\mu$ F     | 1 nF                                     | 150 k $\Omega$         | 4 V                     | 1.0 + 3   |   |   |                   |   |  |  |  |  |
|   | 30.000 $\mu$ F    | 10 nF                                    | 15 k $\Omega$          | 2 V                     | 1.0 + 3   |   |   |                   |   |  |  |  |  |
|   | 300.0 $\mu$ F     | 100 nF                                   | 1.5 k $\Omega$         | 2 V                     | 5.0 + 6   |   |   |                   |   |  |  |  |  |
|   | 3000 $\mu$ F      | 1 $\mu$ F                                | 1.5 k $\Omega$         | 2 V                     | 5.0 + 6   |   |   |                   |   |  |  |  |  |
|   |                   |  | 10 $\mu$ F             | 1.5 k $\Omega$          | 5.0 + 6   |   |   |                   |   |  |  |  |  |
|   |                   |  | $f_{\text{min}}^{(6)}$ |                         |   |   |   |                   |   |  |  |  |  |
| <b>Hz</b>                                 | 300.00 Hz         | 0.01 Hz                                  | 10 Hz                  |                         | 0.1 + 3 <sup>7)</sup>   | $\leq 3 \text{ kHz};$<br>$1000 \text{ V}$<br>$\leq 30 \text{ kHz};$<br>$300 \text{ V}$<br>$\leq 100 \text{ kHz};$<br>$30 \text{ V}$ | cont.                                   | <b>Hz</b>         |   |  |  |  |  |
|   | 3.0000 kHz        | 0.1 Hz                                   | 10 Hz                  |                         |   |   |   |                   |   |  |  |  |  |
|   | 30.000 kHz        | 1 Hz                                     | 10 Hz                  |                         |   |   |   |                   |   |  |  |  |  |
|   | 100.00 kHz        | 10 Hz                                    | 100 Hz                 |                         |   |   |   |                   |   |  |  |  |  |
| <b><math>^{\circ}\text{C}</math></b>      | Pt 100            | - 200.0...<br>+ 100.0 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | —                       | —   | 0.5 Kelvin + 3 <sup>8)</sup>  | 1000 V<br>DC<br>AC<br>rms<br>sine       | 1 min.            | <b><math>^{\circ}\text{C}</math></b>      |  |  |  |  |
|   | Pt 1000           | + 100.0...<br>+ 850.0 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | —                       | —   | 0.5 + 3 <sup>8)</sup>   |   |                   |   |  |  |  |  |
|   | Pt 1000           | - 100.0...<br>+ 100.0 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | —                       | —   | 0.5 Kelvin + 3 <sup>8)</sup>  |   |                   |   |  |  |  |  |
|   | Pt 1000           | + 100.0...<br>+ 850.0 $^{\circ}\text{C}$ | 0.1 $^{\circ}\text{C}$ | —                       | —   | 0.5 + 3 <sup>8)</sup>   |   |                   |   |  |  |  |  |

### dB ranges

| Measuring ranges | Display span at reference voltage<br>$U = 0.775 \text{ V}$                      | Display span at reference voltage<br>$U_{\text{ref}} (\text{V})$                |
|------------------|---|---|
| 300 mV ~ 3 V~    | - 48 dB... + 8 dB   | - 40 dB... + 110 dB   |
| 30 V~            | - 38 dB... + 12 dB  | - 60 dB... + 100 dB   |
| 300 V~           | - 18 dB... + 32 dB  | - 80 dB... + 80 dB  |
| 1000 V~          | + 2 dB... + 52 dB   | + 100 dB... + 60 dB   |
|                  | + 22 dB... + 63 dB  | + 110 dB... + 40 dB   |
|                  | Display (dB) =<br>$20 \lg U_{\text{ref}}(\text{V}) / U_{\text{ref}} (\text{V})$ | Display (dB) =<br>$20 \lg U_{\text{ref}}(\text{V}) / U_{\text{ref}} (\text{V})$ |

- 1) TRMS measurement
- values < 100 digit (<500 digit for measuring range 300mV) will be suppressed
- 2) At - 10  $^{\circ}\text{C}$ ... + 40  $^{\circ}\text{C}$
- 3) With zero adjuster; without zero adjuster
- 4) At a resolution of 0.01 dB
- 5) 16 A for 30s
- 6) Lowest measurable frequency with a sinusoidal measuring signal which is symmetrical to zero
- 7) Range
  - 3 V  $\equiv$ :  $U_e = 1 \text{ V}_{\text{eff rms}} \dots 10 \text{ V}_{\text{eff rms}}$
  - 30 V  $\equiv$ :  $U_e = 10 \text{ V}_{\text{eff rms}} \dots 100 \text{ V}_{\text{eff rms}}$
  - 300 V  $\equiv$ :  $U_e = 100 \text{ V}_{\text{eff rms}} \dots 1000 \text{ V}_{\text{eff rms}}$

8) Without sensor




**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in

# Analog - Digital multimeters


## RISH Multi<sup>®</sup> 12S...18S

### Measuring voltage with resistance measurement 12S ... 16S




Voltage  $U_x$  across the resistance  $R_x$  to be measured as a function of measuring range and display.

### Measuring current with diode test and / or continuity test 12S ... 16S




Measuring current  $I_x$  as a function of the displayed voltage  $U_x$  on the device under test.

### Measuring voltage with resistance measurement 18S



Voltage  $U_x$  across the resistance  $R_x$  to be measured as a function of measuring range and display.

### Measuring current with diode test and / or continuity test 18S



Measuring current  $I_x$  as a function of the displayed voltage  $U_x$  on the device under test.

### Reference conditions

|                                    |                |
|------------------------------------|----------------|
| Ambient temperature                | +23°C ± 2K     |
| Relative humidity                  | 45%... 55%     |
| Frequency of the measured quantity | 45 Hz... 65 Hz |
| Waveform of the measured quantity  | Sinusoidal     |
| Battery voltage                    | 8V ± 0.1 V     |



**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in


# Analog - Digital multimeters

## RISH Multi<sup>®</sup> 12S...18S

### Display

LCD field (65 mm x 30 mm) with analog indication and digital display and with annunicators for unit of measurement, function and various special functions.


### Display RISH multi 12S... 16S

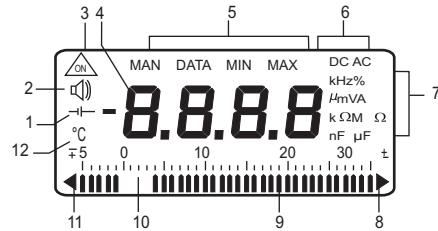

### Analog

|                      |   |
|----------------------|---|
| Indication           | LCD scale with pointer  |
| Scale length         | 55 mm on V $\text{---}$ and A $\text{---}$ ;<br>47 mm on all other ranges   |
| Scaling              | $\pm 5 \dots +30$ with 35 scale divisions on $\text{---}$ ,<br>$0 \dots 30$ with 30 scale divisions on all other ranges |
| Polarity indication  | With automatic reversal   |
| OVERRANGE indication | By triangle   |
| Sampling rate        | 20 readings/s,<br>On $\Omega$ 10 readings/s   |

### Display RISH multi 18S

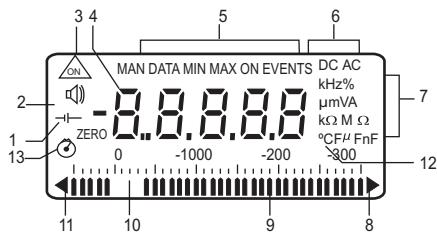

### Digital

|                                       |  |
|---------------------------------------|--|
| Display/<br>height of numerals        | Rish multi 12S... 16S,<br>7 segment numerals / 15mm<br><br>Rish multi 18S:<br>7-segment numerals/12 mm                         |
| Number of counts                      | Rish multi 12S... 16S,<br>3 1/4 digit $\triangleq$ 3100 counts<br><br>Rish multi 18S:<br>4 1/4 digit $\triangleq$ 31000 counts |
| Overrange display<br>Polarity display | "OL" is shown<br>"." sign is shown,<br>When positive pole to " $\perp$ "   |
| Sampling rate                         | 2 readings/s,<br>On $\Omega$ and $^{\circ}\text{C}$ :1 reading/s   |

1. Display with low battery voltage
2. Display with sound signal on
3. Symbol for "CONTINUOUSLY ON"
4. Digital display with indication of decimal point and polarity
5. Display with manual range selection as well as with data and MIN/MAX hold
6. Display of the selected function
7. Display of the unit of measurement
8. Display with overrange
9. Pointer for analog indication
10. Scale for analog indication
11. Indication that negative analog range is exceeded
12. Display of the unit  $^{\circ}\text{C}$  when measuring temperature
13. Display with time counter switched on



**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference


RISHABH INSTRUMENTS PVT.LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in

# Analog - Digital multimeters

## RISH Multi<sup>®</sup> 12S...18S

### Influence quantities and variations for 12S...16S

| Influence quantity                              | Influence range  | Measured quantity / measuring range  | Variation <sup>1)</sup><br>± (...% of meas. val. + ... digits)<br>12S... 14S 15S 16S |
|---|--|--------------------------------------|--|
| Temperature                                     | 0 °C... + 21 °C<br>and<br>+25 °C... + 40 °C  | 30/300 mV =                          | 1.0 ± 3    1.0 ± 1   |
|   |  | 3... 300 V =                         | 0.15 ± 1    0.1 ± 1  |
|   |  | 1000 V =                             | 0.2 ± 1    0.1 ± 1   |
|   |  | V -                                  | 0.4 ± 2    0.3 ± 2   |
|   |  | 300 µA <sup>2)</sup> ...             | 0.5 ± 1    0.15 ± 1  |
|   |  | 300 mA =                             |  |
|   |  | 3A / 10 (16) A =                     | 0.5 ± 1  |
|   |  | A ~                                  | 0.75 ± 1    0.75 ± 3   |
|   |  | 30 Ω <sup>2)</sup>                   | 0.25 ± 2    0.15 ± 2   |
|   |  | 300Ω                                 | 0.15 ± 1    0.1 ± 1  |
|   |  | 3 kΩ... 3 MΩ                         | 1.0 ± 1    0.6 ± 1   |
|   |  | 30 MΩ                                |  |
|   |  | 30 nF... 3 µF                        | —    0.5 ± 2   |
|   |  | 30 µF                                | —    2.0 ± 2   |
|   |  | Hz                                   | —    0.5 ± 1   |
|   |  | %                                    | —    ± 5 D   |
|   |  | -200... + 200 °C                     | 0.5 K ± 2  |
|   |  | + 200... + 850 °C                    | 0.5 ± 2  |
| Frequency of the measured quantity              | 15 Hz... < 30 Hz<br>30 Hz... < 45 Hz<br>> 400 Hz... 400Hz<br>> 400 Hz... 1 kHz<br>> 1kHz... 20 kHz       | 15 Hz... < 30 Hz                     | —    —    1.0 ± 3  |
|   |  | 30 Hz... < 45 Hz                     | —    —    0.5 ± 3  |
|   |  | 3... 300 V ~                         | 2.0 ± 3    0.5 ± 3   |
|   |  | > 400 Hz... 1 kHz                    | 2.0 ± 3    1.0 ± 3   |
|   |  | > 1kHz... 20 kHz                     | —    —    2.0 ± 3  |
|   |  | 15 Hz... < 30 Hz                     | —    —    1.0 ± 3  |
|   |  | 30 Hz... < 45 Hz                     | —    —    0.5 ± 3  |
|   |  | 1000 V ~                             | 3.0 ± 3    2.0 ± 3   |
|   |  | > 65 Hz... 1kHz                      | —    —    2.0 ± 3  |
|   |  | 15 Hz... < 30 Hz                     | —    —    1.0 ± 3  |
|   |  | 30 Hz... < 45 Hz                     | —    —    0.5 ± 3  |
|   |  | > 65 Hz... 1kHz                      | 2.0 ± 3    3.0 ± 3   |
|   |  | A ~                                  |  |
|   |  | Crest factor CF                      | 1...3  |
|   |  | V ~ <sup>4)</sup> , A~ <sup>4)</sup> | —    —    ± 1% of rdg.   |
|   |  | > 3...5                              | —    —    ± 3 % of rdg.  |
| Waveform of the measured quantity <sup>3)</sup> | The permissible crest factor CF of the AC quantity to be measured is a function of the displayed value : | CF                                   | Voltage measurement CF   |
|   |  | 5                                    | 5  |
|   |  | 4                                    | 4  |
|   |  | 3                                    | 3  |
|   |  | 2                                    | 2  |
|   |  | 1                                    | 1  |
|   |  | 0                                    | 0  |
|   |  | 0                                    | 500 V  |
|   |  | 1000 V                               | 0  |
|   |  | 0                                    | 1000   |
|   |  | 2000                                 | 0  |
|   |  | 3000 D                               | 0  |
|   |  | CF                                   | Voltage measurement  |
|   |  | 5                                    | 5  |
|   |  | 4                                    | 4  |
|   |  | 3                                    | 3  |
|   |  | 2                                    | 2  |
|   |  | 1                                    | 1  |
|   |  | 0                                    | 0  |
|   |  | 0                                    | 5000 V   |
|   |  | 10000 D                              | 0  |
|   |  | CF                                   | Current measurement  |

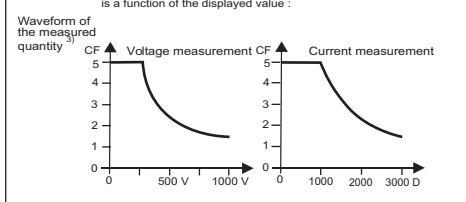

### Influence quantities and variations for 18S

| Influence quantity                              | Influence range  | Measured quantity / measuring range  | Variation <sup>2)</sup><br>± (...% of meas. val. + ... digits) |
|---|--|--------------------------------------|--|
| Temperature                                     | - 10 °C... + 21 °C<br>and<br>+25 °C... + 40 °C   | V ==                                 | 0.05 ± 3   |
|   |  | V ~, V =                             | 0.2 ± 30   |
|   |  | 300 µA / 3 mA                        | 0.2 ± 3  |
|   |  | 30 mA ==                             | 0.1 ± 3  |
|   |  | 300 mA... 10 A ==                    | 0.2 ± 3  |
|   |  | 300 µA... 300 mA ==                  | 0.3 ± 30   |
|   |  | 3A / 10 A ==                         | 0.5 ± 30   |
|   |  | 300 Ω                                | 0.1 ± 5  |
|   |  | 3 kΩ... 3 MΩ                         | 0.1 ± 3  |
|   |  | 30 MΩ                                | 0.6 ± 3  |
|   |  | 30 nF... 3 µF                        | 0.5 ± 3  |
|   |  | 30 µF                                | 2.0 ± 3  |
|   |  | Hz                                   | 0.1 ± 3  |
|   |  | -200... + 100 °C                     | 0.5 Kelvin ± 2 D   |
|   |  | + 100... + 850 °C                    | 0.5 ± 2  |
|   |  |                                      |  |
|   |  |                                      |  |
| Frequency of the measured quantity              | 15 Hz... < 45 Hz<br>30 Hz... < 45 Hz<br>> 400 Hz... 400Hz<br>> 400 Hz... 1 kHz<br>> 1 kHz... 20 kHz      | 15 Hz... < 45 Hz                     | 1.0 ± 20   |
|   |  | 65 Hz... < 200 Hz                    | 1.4 ± 20   |
|   |  | > 15 Hz... < 30 Hz                   | 1.0 ± 20   |
|   |  | > 30 Hz... < 45Hz                    | 0.5 ± 20   |
|   |  | > 65 Hz... 400 Hz                    | 0.5 ± 20   |
|   |  | > 400 Hz... 1 kHz                    | 1.0 ± 20   |
|   |  | > 1 kHz... 20 kHz                    | 2.0 ± 20   |
|   |  | 15 Hz... < 30 Hz                     | 1.0 ± 20   |
|   |  | 30 Hz... < 45 Hz                     | 0.5 ± 20   |
|   |  | 1000 V ~                             | 2.0 ± 20   |
|   |  | > 65 Hz... 1 kHz                     | 2.0 ± 20   |
|   |  | 15 Hz... < 45 Hz                     | 1.0 ± 20   |
|   |  | > 65 Hz... 1kHz                      | 1.0 ± 20   |
|   |  | A ~                                  |  |
|   |  | Crest factor CF                      | 1...3  |
|   |  | V ~ <sup>4)</sup> , A~ <sup>4)</sup> | ± 1% of rdg.   |
|   |  | > 3...5                              | ± 3 % of rdg.  |
| Waveform of the measured quantity <sup>3)</sup> | The permissible crest factor CF of the AC quantity to be measured is a function of the displayed value : | CF                                   | Voltage measurement CF   |
|   |  | 15 Hz... < 45 Hz                     | 300 mV ~   |
|   |  | 65 Hz... < 200 Hz                    | 1.4 ± 20   |
|   |  | > 15 Hz... < 30 Hz                   | 1.0 ± 20   |
|   |  | > 30 Hz... < 45Hz                    | 0.5 ± 20   |
|   |  | > 65 Hz... 400 Hz                    | 0.5 ± 20   |
|   |  | > 400 Hz... 1 kHz                    | 1.0 ± 20   |
|   |  | > 1 kHz... 20 kHz                    | 2.0 ± 20   |
|   |  | 15 Hz... < 30 Hz                     | 1.0 ± 20   |
|   |  | 30 Hz... < 45 Hz                     | 0.5 ± 20   |
|   |  | 1000 V ~                             | 2.0 ± 20   |
|   |  | > 65 Hz... 1 kHz                     | 2.0 ± 20   |
|   |  | 15 Hz... < 45 Hz                     | 1.0 ± 20   |
|   |  | > 65 Hz... 1kHz                      | 1.0 ± 20   |
|   |  | A ~                                  |  |
|   |  | Crest factor CF                      | 1...3  |
|   |  | V ~ <sup>4)</sup> , A~ <sup>4)</sup> | ± 1% of rdg.   |
|   |  | > 3...5                              | ± 3 % of rdg.  |
| Waveform of the measured quantity <sup>3)</sup> | The permissible crest factor CF of the AC quantity to be measured is a function of the displayed value : | CF                                   | Current measurement  |
|   |  | 15 Hz... < 45 Hz                     | 5  |
|   |  | 65 Hz... < 200 Hz                    | 5  |
|   |  | > 15 Hz... < 30 Hz                   | 4  |
|   |  | > 30 Hz... < 45Hz                    | 3  |
|   |  | > 65 Hz... 400 Hz                    | 2  |
|   |  | > 400 Hz... 1 kHz                    | 1  |
|   |  | > 1 kHz... 20 kHz                    | 0  |
|   |  | 15 Hz... < 30 Hz                     | 5  |
|   |  | 30 Hz... < 45 Hz                     | 4  |
|   |  | 10000 D                              | 3  |
|   |  | CF                                   | Current measurement  |

| Influence quantity | Influence range                     | Measured quantity / measuring range | Variation 12S... 16S |
|--------------------|-------------------------------------|-------------------------------------|----------------------|
| Battery voltage    | 5) ... < 7.9 V<br>> 8.1 V... 10.0 V | V ==                                | ± 2 D                |
|                    |                                     | V ~                                 | ± 4 D                |
|                    |                                     | A ==                                | ± 4 D                |
|                    |                                     | A~                                  | ± 6 D                |
|                    |                                     | 300 / 3000 Ω / °C                   | ± 4 D                |
|                    |                                     | 3 kΩ... 30 MΩ                       | ± 3 D                |
|                    |                                     | nF, µF                              | ± 1 D                |
|                    |                                     | Hz                                  | ± 1 D                |
|                    |                                     | %                                   | ± 1 D                |
|                    |                                     |                                     |                      |
| Relative humidity  | 75 %<br>3 days<br>Meter off         | V =                                 |                      |
|                    |                                     | A =                                 |                      |
|                    |                                     | Ω                                   |                      |
|                    |                                     | F                                   |                      |
|                    |                                     | Hz                                  |                      |
| DATA               |                                     | %                                   | 1x Intrinsic error   |
|                    |                                     | °C                                  | ± 1 D                |
| MIN / MAX          |                                     | V =, A =                            | ± 2 D                |

| Influence quantity | Influence range                     | Measured quantity / measuring range | Variation             |
|--------------------|-------------------------------------|-------------------------------------|-----------------------|
| Battery voltage    | 5) ... < 7.9 V<br>> 8.1 V... 10.0 V | V ==                                | ± 6 D                 |
|                    |                                     | V ~                                 | ± 30 D                |
|                    |                                     | A ==                                | ± 30 D                |
|                    |                                     | A~                                  | ± (1% of rdg. + 10D)  |
|                    |                                     | Ω                                   | ± 10 D                |
|                    |                                     | 3 nF... 30 µF                       | ± 10 D                |
|                    |                                     | Hz                                  | ± 6 D                 |
|                    |                                     | °C                                  | ± 5 D                 |
|                    |                                     |                                     |                       |
|                    |                                     |                                     |                       |
| Relative humidity  | 75 %<br>3 days<br>Meter off         | V, dB, A, Ω, F, Hz                  | 1x inherent deviation |
|                    |                                     |                                     |                       |
| DATA               |                                     | V, dB, A, Ω, Hz                     | ± 20 D                |
|                    |                                     | F                                   | ± 2 D                 |
| MIN / MAX          |                                     | V, dB, A, Ω, Hz                     | ± 10 D                |
|                    |                                     | °C, F                               | ± 1 D                 |

- 1) With temperature; Error data is per 10 K change in temperature.  
With frequency; Error data is valid from a display of 300 digits.

- 2) With zero setting  
With frequency; Error data is valid from a display of 10% of the measuring range.

- 3) With unknown waveform (crest factor CF > 2), the measurement must be made with manual range selection.

- 4) Except for sinusoidal waveform

- 5) From the time the symbol "I—" appears.

- 5) From the time the symbol "I—" appears.

# Analog - Digital multimeters

## RISH Multi<sup>®</sup> 12S...18S

| Influence quantity  | Influence range   | Meas. range 12S...16S | Damping            |
|---------------------|---|-----------------------|--------------------|
| Common mode voltage | Disturbance variable max. 1000 V ~  | V ==                  | > 120 dB           |
|                     | Disturbance variable max. 1000 V ~ 50 Hz, 60 Hz sinusoidal  | 3 V ~<br>30 V ~       | > 70 dB<br>> 70 dB |
|                     |   | 300 V ~<br>1000 V ~   | > 70 dB<br>> 60 dB |
| Normal mode voltage | Disturbance variable V ~ nom. value of measured range at a time, max. 1000 V ~, 50 Hz, 60 Hz sinusoidal | V ==                  | > 50 dB            |
|                     | Disturbance variable max. 1000 V --   | V ~                   | > 110 dB           |

| Influence quantity  | Influence range   | Meas. range 18S    | Damping            |
|---------------------|---|--------------------|--------------------|
| Common mode voltage | Disturbance variable max. 1000 V ~  | V ==               | > 120 dB           |
|                     | Disturbance variable max. 1000 V ~ 50 Hz, 60 Hz sinusoidal  | 300 mV ~<br>30 V ~ | > 80 dB<br>> 70 dB |
| Normal mode voltage | Disturbance variable V ~ nom. value of measured range at a time, max. 1000 V ~, 50 Hz, 60 Hz sinusoidal | V ==               | > 48 dB            |
|                     | Disturbance variable max. 1000 V --   | V ~                | > 110 dB           |

### Response time

#### Response time for 12S...16S (after manual range selection)

| Measured quantity measuring range | Response time of analog indication | Response time of digital display | Leap function of the measured quantity        |
|-----------------------------------|------------------------------------|----------------------------------|---|
| V == V ~                          | 0.7 s                              | 1.5 S                            | from 0 to 80% of the upper range limit        |
| A == A ~                          | 1.5 S                              | 2 S                              | from $\infty$ to 50% of the upper range limit |
| 30Ω...3MΩ                         | 4 S                                | 5 S                              |   |
| 30MΩ                              | 0.7 S                              | 1.5 S                            |   |
| nF, μF, °C                        |                                    | max. 1...3S                      |   |
| 300...3kHz                        |                                    | max. 2 S                         |   |
| 30...100kHz                       |                                    | max. 0.7 S                       |   |
| % (1 Hz)                          |                                    | max. 9 S                         |   |
| % (>10 Hz)                        |                                    | max. 2.5 S                       |   |

#### Response time for 18S (after manual range selection)

| Measured quantity measuring range | Response time of analog indication | Response time of digital display | Leap function of the measured quantity        |
|-----------------------------------|------------------------------------|----------------------------------|---|
| V == V ~                          | 0.7 S                              | 1.5 S                            | from 0 to 80% of the upper range limit        |
| A == A ~                          | 1.5 S                              | 2 S                              | from $\infty$ to 50% of the upper range limit |
| 30Ω...3MΩ                         | 4 S                                | 5 S                              |   |
| 30MΩ                              | 0.7 S                              | 1.5 S                            |   |
| 3 nF...300 μF                     |                                    | max. 2 S                         |   |
| 3 000 μF                          |                                    | max. 7 S                         |   |
| 10 000 μF                         |                                    | max. 14 S                        |   |
| > 10 Hz                           |                                    | max. 1.5 S                       |   |
| °C                                |                                    | max. 3 S                         |   |

### Power supply

|                |   |
|----------------|---|
| Battery        | 9-V flat cell battery:<br>manganese-dioxide cell according to IEC 6 F 22.<br>alkaline Manganese cell according to IEC 6 LR 61 or corresponding NiCd storage battery<br>With alkaline-manganese cell:<br>RISH multi 12...16S:<br>approx. 220 hours on V ==, A ==<br>Approx. 80 hours on V ~, A ~ (12S...15S)<br>approx. 60 hours on V~, A~ (16S) with interface operation times x 0.7<br>RISH multi 18S:<br>approx. 120 hours on V ==<br>approx. 90 hours on V~, A~ A ==<br>Automatic display of the "—" symbol, when the battery voltage drops below approximately 7 V. |
| Operating time |   |
| Battery test   |   |

### Fuses

|                                       |   |
|---------------------------------------|---|
| Fuse link for the ranges up to 300 mA | FF 1.6A/1000V 6.3 mm x 32 mm;<br>Switching capacity 10 kA on 1000 VAC/DC and ohmic load; in connection with power diodes protects all current measuring ranges up to 300 mA |
| Fuse link for ranges up to 10A        | 16 A / 1000 V or 15 A / 1000 V 10 mm X 38 mm, Switching capacity 30 kA on 600 V ~ and ohmic load; protects the 3 A and 10 A ranges up to 1000 V                             |

### Electrical Safety

(Except 13S)

|                      |                                     |      |
|----------------------|-------------------------------------|------|
| Protection class     | As per IEC 61010-1:2001             |      |
| Oversupply category  | III                                 | IV   |
| Nominal voltage      | 1000 V                              | 600V |
| Degree of pollution  | 2                                   | 2    |
| Nominal Test Voltage | 6.7KV~ acc. To IEC 348/DIN VDE 0411 |      |

### Electromagnetic compatibility EMC

|          |   |
|----------|---|
| Emission | EN 61326: 2002 class B  |
| Immunity | EN 50082-1: 1992<br>EN 61326: 2002<br>IEC 61000-4-2 8 KV atmospheric discharge<br>4 KV contact discharge<br>IEC 61000-4-3 3 V/m |
|          |   |

### Date interface

|                   |   |
|-------------------|---|
| Type              | RS-232C, serial, according to DIN 19241       |
| Data transmission | Optical, with infrared light through the case |
| Baud rate         | 8192 bit/s                                    |



**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in


# Analog - Digital multimeters

## RISH Multi<sup>®</sup> 12S...18S

### Environmental conditions

|   |  |
|---|--|
| Working temperature range                   | RISH multi 12S... 16S:<br>-10 °C... + 50 °C<br>RISH multi 18S:<br>-20 °C... + 50 °C  |
| Storage temperature range<br>Climatic class | -25 °C... + 70 °C (excl. batteries)<br>RISH multi 12S... 16S:<br>2z/-10/50/70/75%<br>with reference to VDI/VDE 3540<br>RISH multi 18S:<br>2z/-20/50/70/75%<br>with reference to VDI/VDE 3540 |
| Altitude above sea level                    | up to 2000m  |

### Operating controls 12S... 18S

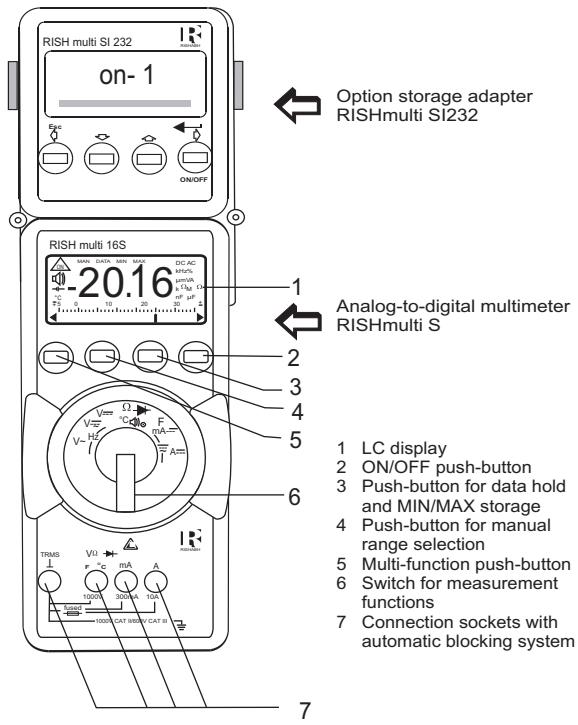

### Mechanical configuration

|                      |   |
|----------------------|---|
| Protection type      | For meters; IP 50,<br>for connection sockets: IP 20       |
| Dimensions<br>Weight | 84 mm x 195 mm x 35 mm<br>0.35 kg, approx., incl. battery |

### Scope of delivery

- 1 multimeter
- 1 Probe Set
- 1 copy of operating instructions
- 1 test certificate
- 1 rubber holster with tilt stand and carrying strap
- warranty card
- 1 set of extra fuses.

### Warranty

3 year against defects in materials and workmanship & calibration from the date of purchase.



**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in

# Analog - Digital multimeters

RISH Multi<sup>®</sup> 12S...18S

## Ordering Information

### Order Code

| Designation   | Type   | Order Code   |
|---|--|--|
| Multimeter  | RISH multi 12s<br>RISH multi 13s<br>RISH multi 14s<br>RISH multi 15s<br>RISH multi 16s<br>RISH multi 18s | 33001<br>33002<br>33003<br>33005<br>33006<br>33007 |
| Cable set   | KS 17  | 42126  |
| Carrying Bag  | F 389  | 42179  |
| Voltage probe upto 3 KV   | HV 3   | 42115  |
| Voltage probe upto 30 KV  | HV 30  | 42123  |
| Clip on current transformer 1000A, 1mA/A  | Z3512  | 42119  |
| Shunt 100 A / 100mV   | GE 4277  | 42178  |
| Temperature sensor pt 100   | Z 3409   | 42116  |
| Temperature sensor pt 1000  | Z 3408   | 42122  |
| Single channel storage pack including memory adapter SI 232, Cable & Software RISHcom 100     | 1 CH pack  | 33021  |
| Four channel storage pack including 4 nos memory adapter SI 232, Cable & Software RISHcom 100 | 4 CH pack  | 33023  |



**RISHABH**  
**INSTRUMENTS**  
Measure, Control & Record with a Difference

RISHABH INSTRUMENTS PVT.LTD.  
F-31, MIDC, Satpur, Nashik-422 007, India.  
Tel.: +91 253 2202160, 2202202 Fax : +91 253 2351064  
E-mail : marketing@rishabh.co.in  
www.rishabh.co.in